




# Breathable Acrylic Water Based Floor Sealer

FeRFA Type 1 System  
DFT = <150µ

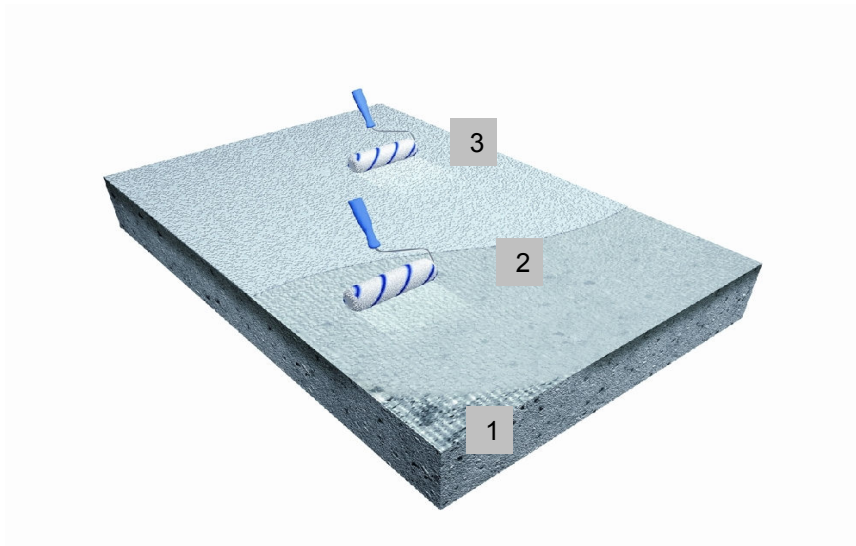

- 1. Surface preparation by suitable mechanical means.
- 2. Application by roller of Liquid Plastic.
- 3. Optional second application of Liquid Plastic.

## Typical Environment

	Light Loads	✓
	Moderate Loads	✗
	Increased Loads	✗
	Heavy Loads	✗

## Suitable for Surfaces

Clean concrete without surface sealer	
Open textured screeds	
Prepared concrete by ball blasting	
Prepared concrete by grinding	
Walls	

### System Properties:

- Water based
- Damp tolerant
- Dustproofs
- For mineral substrates
- Fast drying
- Surface strengthening effect
- For walls and floors
- Easy to maintain
- Very economic





## Breathable Acrylic Water Based Floor Sealer

FeRFA Type 1 System  
DFT = <150 $\mu$

Item	Operation	Material / m <sup>2</sup>	Price / m <sup>2</sup>
1	<b>Surface Preparation</b> The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.		
2	<b>Priming</b> Apply by roller or squeegee and back roller, Liquid Plastic avoiding any ponding of the product. Allow to dry for 30 mins – 1 hour.	0.1-0.2 l/m <sup>2</sup>	
3	<b>Second Coat</b> Apply by roller or squeegee and back roller, Liquid Plastic avoiding any ponding of the product. Allow to dry.	0.1-0.15 l/m <sup>2</sup>	
<b>Total</b>			

**Notes:** Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.