




Highly Chemical Resistant, High Build Coating

FeRFA Type 3 System
DFT = 600-1000µ

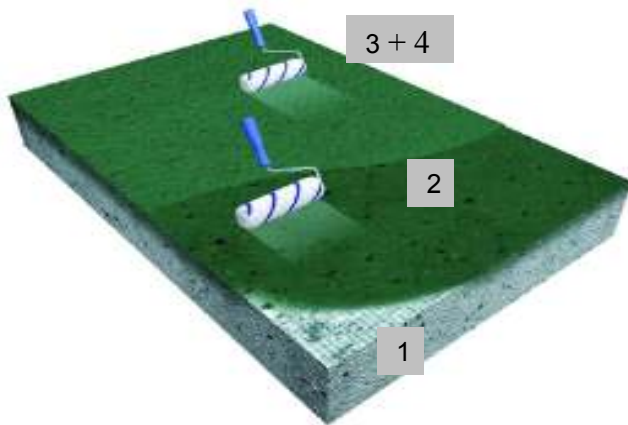

1. Surface preparation by suitable mechanical means.
2. The prepared substrate is primed with Epoxy ST100 by roller.
3. Application of intermediate coat of Epoxy CR Color.
4. Application of top coat of Epoxy CR Color.

System Properties:

- Highly chemical resistant
- Solvent Free
- Wide range of colours
- Easy to clean
- High film thickness
- East to apply

Typical Environment

	Light Loads	✓
	Moderate Loads	✓
	Increased Loads	✓
	Heavy Loads	✗

Suitable for Surfaces

Repaired surfaces	
Steel ball blasted surface	
Ground surfaces	
Concrete slabs	





Highly Chemical Resistant, High Build Coating

FeRFA Type 3 System
DFT = 600-1000 μ

Item	Operation	Material / m ²	Price / m ²
1	Surface Preparation The substrate shall be prepared by suitable means to remove all contaminants and weakness to give a clean, sound load-bearing surface. If over coating an existing finish a trial shall be conducted to assess bond.		
2	Priming The substrate is primed using Epoxy ST100.	0.3 – 0.5 kg/m ²	
3	Intermediate Coat The primed surface is coated with Epoxy CR Color.	0.5 kg/m ²	
4	Top Coat The intermediate coat is sealed with a further coat of Epoxy CR Color	0.5 kg/m ²	
Total			

Notes: Application rates and coverage are theoretical and do not allow for surface profile variation, wastage or variation in application technique. In the case of high substrate roughness you should allow for additional levelling material to be used.